


Norylux modified PPO is a strong engineering plastic with outstanding mechanical, thermal, and electrical properties. Low moisture absorption and low thermal expansion make Norylux one of the most dimensionally stable thermoplastics available. Norylux is widely used for electrical housings and structural components since it has excellent insulating properties, flame resistance, and dimensional stability over a wide range of service temperatures. Norylux is often selected for fluid handling applications since it has low moisture absorption and excellent strength and stiffness. Norylux is easy to fabricate, paint, and glue.

The following physical property information is based on typical values of the base modified polyphenylene oxide resin.

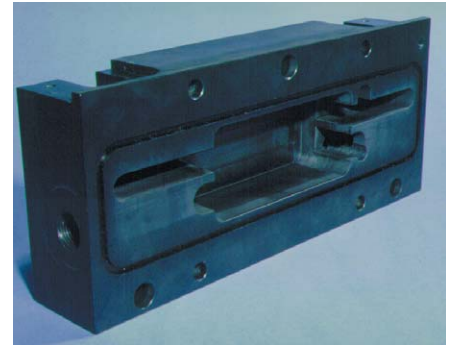

Norylux Manifold

	Units	ASTM Test	EN-265	30% GF
Mechanical				
Flexural Modulus	psi	D790	370,000	830,000
Flexural Strength @yield	psi	D790	14,400	22,000
Hardness-Rockwell	—	D785	R119	L106
Izod Impact Strength				
Notched @-40°F	ft•lbs/in	D256	2.5	1.8
Notched @73°F	ft•lbs/in	D256	3.5	2.0
Tensile Elongation @break	%	D638	25.0	5.0
Tensile Strength @yield	psi	D638	9,200	15,500
Thermal				
Coefficient of Thermal Expansion	in/in/°F	D696	3.3x10 ⁻⁵	1.4x10 ⁻⁵
Flammability Rating-UL94				
@.058"	—	—	V-1	V-1
@.236"	—	—	V-0	V-0
Heat Deflection Temperature				
@66psi	°F	D648	—	280
@264psi	°F	D648	254	270
Electrical				
Dielectric Constant @60Hz	—	D150	2.69	3.15
Dielectric Strength	V/mil	D149	500	600
Dissipation Factor @60Hz	—	D150	0.0007	0.0016
Other				
Specific Gravity	—	D792	1.08	1.23
Water Absorption				
@24 hours	%	D570	0.070	0.060

Applications Include:

- Manifolds
- Pump, valve, and fitting applications
- Scientific and analytical instrument components
- Housings
- Covers
- Electrical components

Advantages of Norylux:

- Excellent dimensional stability
- Low moisture absorption
- Good strength and stiffness over a wide range of service temperatures
- Good impact resistance
- High dielectric strength
- Easy to fabricate, paint, and glue
- Excellent flammability rating (UL94 V-1 @ .058" thick)

Manufacturing Capabilities:

- Rod:** 1/8" to 8" diameter
- Sheet:** .030" to 6" thick
- Film:** .005" to .029" thick

Colors/Grades:

- Black (standard)
- Glass-filled (gray)
- (custom colors available)
- FDA compliant grades available on a custom basis

*In addition to our standard capabilities, Westlake also has the ability to process custom resins in various sizes and colors with some exceptions.



World Headquarters
 P.O. Box 127, Lenni, PA 19052
 1-800-999-1700 • Fax: (610) 459-1084

www.westlakeplastics.com



Alpert Engineering Ltd
 Dublin Industrial Estate,
 Glasnevin, Dublin 11, Ireland
www.alpert.com info@alpert.com
 Phone +353 1 8306277

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe

any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.

Norylux™ is a Trademark of Westlake Plastics Co.